

FEATURES:

- Comply with RoHS standard, UL1950, IEC950 safety procedures
- Wide voltage input range, broadband noise filtering; Low ripple output
- Typical efficiency 82%
- High isolation voltage, short circuit, overload, overheat protection self-recovery
- Miniaturized design
- Fast dynamic response
- Size:98*52.5*21.5mm
- Weight:180g
- Widely used in military, communications, industrial control, transportation, electric power, new energy and scientific research and experiment and other fields



Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normal (VAC)	Range (VAC)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LD75E-12S05	12	9-18	5	15000			
LD75E-12S12			12	6250			
LD75E-12S15			15	5000			
LD75E-12S24			24	3100			
LD75E-12S28			28	2680			
LD75E-12S48			48	1560			
LD75E-12D05			+5	7500	-5	7500	
LD75E-12D12			+12	3125	-12	3125	
LD75E-12D15			+15	2500	-15	2500	
LD75E-12D24			+24	1563	-24	1563	
LD75E-12D28			+28	1339	-28	1339	
LD75E-12D48			+48	781	-48	781	
LD75E-12S05S12			+5	5000	+12	4167	
LD75E-12S05S24			+5	5000	+24	2083	
LD75E-24S05			24	18-36	5	15000	
LD75E-24S12	12	6250					
LD75E-24S15	15	5000					
LD75E-24S24	24	3100					
LD75E-24S28	28	2680					
LD75E-24S48	48	1560					
LD75E-24D05	+5	7500			-5	7500	
LD75E-24D12	+12	3125			-12	3125	
LD75E-24D15	+15	2500			-15	2500	
LD75E-24D24	+24	1563			-24	1563	
LD75E-24D28	+28	1339			-28	1339	
LD75E-24D48	+48	781			-48	781	
LD75E-24S05S12	+5	5000			+12	4167	

LD75E-24S05S24			+5	5000	+24	2083			
LD75E-48S05			5	15000					
LD75E-48S12	48	36-72	12	6250					
LD75E-48S15			15	5000					
LD75E-48S24			24	3100					
LD75E-48S28			28	2680					
LD75E-48S48			48	1560					
LD75E-48D05			+5	7500	-5	7500			
LD75E-48D12			+12	3125	-12	3125			
LD75E-48D15			+15	2500	-15	2500			
LD75E-48D24			+24	1563	-24	1563			
LD75E-48D28			+28	1339	-28	1339			
LD75E-48D48			+48	781	-48	781			
LD75E-48S05S12			+5	5000	+12	4167			
LD75E-48S05S24			+5	5000	+24	2083			
LD75E-110S05					5	15000			
LD75E-110S12			110	72-144	12	6250			
LD75E-110S15					15	5000			
LD75E-110S24	24	3100							
LD75E-110S28	28	2680							
LD75E-110S48	48	1560							
LD75E-110D05	+5	7500			-5	7500			
LD75E-110D12	+12	3125			-12	3125			
LD75E-110D15	+15	2500			-15	2500			
LD75E-110D24	+24	1563			-24	1563			
LD75E-110D28	+28	1339			-28	1339			
LD75E-110D48	+48	781			-48	781			
LD75E-110S05S12	+5	5000			+12	4167			
LD75E-110S05S24	+5	5000			+24	2083			

customized accepted,pls contact sales for details

Input Specifications

	Input Voltage Range (Vdc)	Nom(Vdc)	Max (Vdc)
Input Voltage Range	9-18	12	18
	18-36	24	36
	36-72	48	72
	72-144	110	144

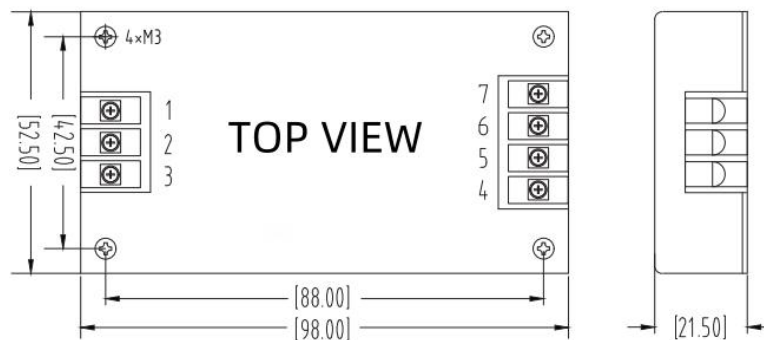
Output Specifications

Item	Min	Typ	Max	Test Conditions
Voltage Accuracy		±1%		
Voltage Adjust Rate		±0.2%		
Load Regulation		±0.5%		

Auxiliary Voltage Accuracy		±3%	
Ripple&Noisy		±1%	
Temperature Regulation		±0.02%/°C	
Over Current Protect	120%		150%
Short Circuit Protect	Burp type, self-recovery		
Dynamic Response	400µS		25% load
General Specifications			
Isolation Resistor	200MΩ	Input-Output	
Isolation Voltage	1500VDC	Input-Output	
	1000VDC	Input-Case	
	500VDC	Output-Case	
Switching Frequency	300KHz	Mil HDBK 217F Tc=25°C	
MTBF	200000Hrs		
Case Temperature	-40~+100°C		
Storage Temperature	-55~+125°C		
Relative Humidity	5%-90%		
Pin Solder Temperature	250°C	Soldering spot is 1.5mm away from case for 10 seconds	
Hand Soldering Time	5s	Iron Temperature 425 °C	
Temperature Coefficient	±0.02%/°C		
Shock	5G	10~55Hz	
Cooling	Free Air		
Weight	180g (Typ)		

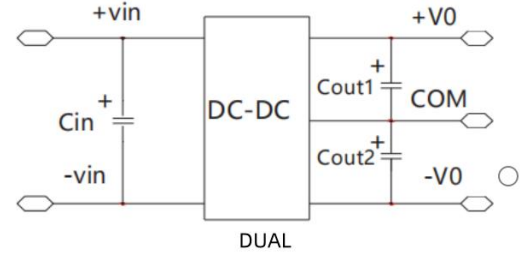
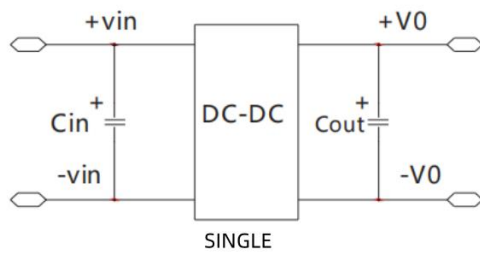
**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25°C room temperature environment.

Dimensions and Recommended Layout



Unit:mm

Recommended Circuit

**Remark:**

Adding input capacitor CIN helps to improve electromagnetic compatibility. Electrolytic capacitor 47 uf-100uf CIN is recommended. If the module is connected to a digital circuit, add cout, cout1, cout2

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.