

## FEATURES:

- Fixed input, single/dual unregulated output, 3W
- Continuous short-circuit protection, self recover
- I/O isolation voltage 1.5KV
- Working temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- No additional components required
- Stable performance and high reliability (MTBF $\geq$ 3500 K hours)
- Industry standard pin-out
- Flame-retardant case to meet UL94-V0 requirements
- DIP package

## Selection Guide

Part No.	INPUT		OUTPUT			Full Load Efficiency (%/Typ)	Capacitive Load ( $\mu\text{F}$ )		
	Normal (Vdc)	Range (Vdc)	Voltage (Vdc)	Min current (mA)	Max current (mA)				
B0303D-3WR3	3.3	2.97-3.63	3.3	50	500	79			
B0305D-3WR3			5	50	500	85			
B0309D-3WR3			9	33	333	85			
B0312D-3WR3			12	25	250	85			
B0315D-3WR3			15	20	200	86			
B0324D-3WR3			24	13	125	86			
A0303D-3WR3			$\pm 3.3$	$\pm 13$	$\pm 250$				
A0305D-3WR3			$\pm 5$	$\pm 13$	$\pm 250$				
A0309D-3WR3			$\pm 9$	$\pm 8$	$\pm 167$				
A0312D-3WR3			$\pm 12$	$\pm 5$	$\pm 104$				
A0315D-3WR3			$\pm 15$	$\pm 4$	$\pm 83$				
A0324D-3WR3			$\pm 24$	$\pm 3$	$\pm 52$				
B0503D-3WR3			5	4.5-5.5	3.3	50	500	79	
B0505D-3WR3					5	50	500	85	
B0509D-3WR3	9	33			333	85			
B0512D-3WR3	12	25			250	85			
B0515D-3WR3	15	20			200	86			
B0524D-3WR3	24	13			125	86			
A0503D-3WR3	$\pm 3.3$	$\pm 13$			$\pm 250$				
A0505D-3WR3	$\pm 5$	$\pm 13$			$\pm 250$				
A0509D-3WR3	$\pm 9$	$\pm 8$			$\pm 167$				
A0512D-3WR3	$\pm 12$	$\pm 5$			$\pm 104$				
A0515D-3WR3	$\pm 15$	$\pm 4$			$\pm 83$				
A0524D-3WR3	$\pm 24$	$\pm 3$			$\pm 52$				
B1203D-3WR3	12	10.8-13.2			3.3	50	500	79	
B1205D-3WR3					5	50	500	85	
B1209D-3WR3			9	33	333	85			

B1212D-3WR3			12	25	250	85			
B1215D-3WR3			15	20	200	86			
B1224D-3WR3			24	13	125	86			
A1203D-3WR3			±3.3	±13	±250				
A1205D-3WR3			±5	±13	±250				
A1209D-3WR3			±9	±8	±167				
A1212D-3WR3			±12	±5	±104				
A1215D-3WR3			±15	±4	±83				
A1224D-3WR3			±24	±3	±52				
B1503D-3WR3	15	13.5-16.5	3.3	50	500	79			
B1505D-3WR3			5	50	500	85			
B1509D-3WR3			9	33	333	85			
B1512D-3WR3			12	25	250	85			
B1515D-3WR3			15	20	200	86			
B1524D-3WR3			24	13	125	86			
A1503D-3WR3			±3.3	±13	±250				
A1505D-3WR3			±5	±13	±250				
A1509D-3WR3			±9	±8	±167				
A1512D-3WR3			±12	±5	±104				
A1515D-3WR3			±15	±4	±83				
A1524D-3WR3			±24	±3	±52				
B2403D-3WR3			24	21.6-26.4	3.3	50	500	79	
B2405D-3WR3					5	50	500	85	
B2409D-3WR3	9	33			333	85			
B2412D-3WR3	12	25			250	85			
B2415D-3WR3	15	20			200	86			
B2424D-3WR3	24	13			125	86			
A2403D-3WR3	±3.3	±13			±250				
A2405D-3WR3	±5	±13			±250				
A2409D-3WR3	±9	±8			±167				
A2412D-3WR3	±12	±5			±104				
A2415D-3WR3	±15	±4			±83				
A2424D-3WR3	±24	±3			±52				

\*\*customized accepted,pls contact sales for details\*\*

**Input Specifications**

Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		


**Output Specifications**

Item	Typ	Max	Test Conditions
Voltage Accuracy	±1%	±3%	input voltage range and load

Line Regulation	±0.2%	±0.5%	Input voltage from low to high voltage, full load
Load Regulation	±0.5%	±1%	10% to 100% full load
Ripple&Noise	50mVp-p	150mVp-p	20MHz Bandwidth, full load
<b>General Specifications</b>			
Switching Frequency	300KHz(Typ)		100% full load, nominal input voltage
Short-Circuit Protection	Continuous, self-recovery		
Case Temperature Rise	15°C (Typ)		
Temperature Coefficient	0.03%/°C		100% full load
Pin Soldering Resistance Temperature	300°C		Soldering spot is 1.5mm away from case for 10 seconds
Isolation (Input-Output)	1.5KVDC		Input-output electric strength test for 1 minute with a leakage current
Insulation Resistance (Input-Output)	1000MΩ		Input-output resistance 500Vdc
Operating Temperature	-40~+105°C		
Storage Temperature	-55~+125°C		
Storage Humidity	<95%		Non-condensing
Cooling Method	Free air convection		
Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)		
Weight	2.1g (Typ)		

\*\*Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25°C room temperature environment.

**Dimensions and Recommended Layout**

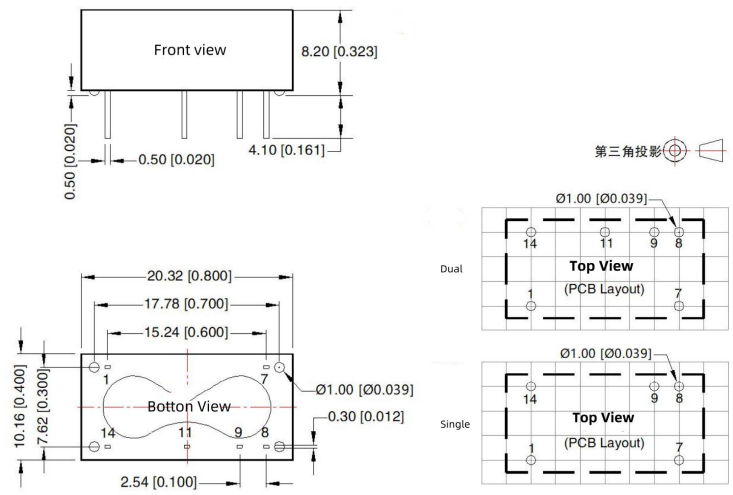

Note:  
Unit: mm[inch]  
Pin section tolerances: ± 0.10[± 0.004]  
General tolerances: ± 0.25[± 0.010]


Pinout			
Pin	Single	Dual	
1	GND	GND	
7	NC	NC	
8	0V	0V	
9	+Vo	+Vo	
11	No Pin	-Vo	
14	Vin	Vin	

**Recommended Circuit**

Dual



Single

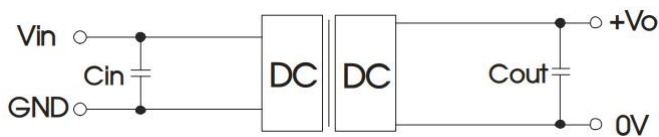

Recommended input and output capacitor values					
Vin	Cin	Dual Vout	Cout	Single Output	Cout
3.3VDC	10uF/16V	±3.3VDC	4.7uF/16V	3.3VDC	10uF/16V
5VDC	4.7uF/16V	±5/7VDC	4.7uF/16V	5VDC	10uF/16V
12VDC	2.2uF/25V	±9VDC	1uF/16V	9VDC	2.2uF/25V
15VDC	2.2uF/25V	±12/15VDC	1uF/25V	12VDC	2.2uF/25V
24VDC	1uF/50V	±24VDC	0.47uF/50VDC	15VDC	2.2uF/25V
-	-	-	-	24VDC	1uF/50V

**Noted**

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.