

FEATURES:

- Wide input range
- Continuous short-circuit protection, self recover
- I/O isolation voltage 1.5KV
- Working temperature: -40℃~+105℃
- No additional components required
- Stable performance and high reliability (MTBF≥2 million hours)
- Industry standard pin-out
- DIP package

Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normal (Vdc)	Range (Vdc)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LD150H-96S12	96	65-150	12	12500			
LD150H-96S15			15	10000			
LD150H-96S24			24	6250			
LD150H-96S28			28	5357			
LD150H-96S48			48	3125			
LD150H-110S12	110	82-180	12	12500			
LD150H-110S15			15	10000			
LD150H-110S24			24	6250			
LD150H-110S28			28	5357			
LD150H-110S48			48	3125			
LD150H-300S12	300	200-400	12	12500			
LD150H-300S15			15	10000			
LD150H-300S24			24	6250			
LD150H-300S28			28	5357			
LD150H-300S48			48	3125			

customized accepted ,pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vdc)		Nom(Vdc)	Max (Vdc)
	65-150		96	150
	82-180		110	180
	200-400		300	400
Input Filter	Capacitive Filter			
Ctrl	NONE			
	NONE			
Hot Plug	Unavailable			

Output Specifications

Item	Min	Typ	Max	Test Conditions
Voltage Accuracy		±1%	±3%	
Line Regulation		±0.2%	±1%	


Load Regulation		$\pm 0.5\%$	$\pm 1\%$	
TRIM Range			$\pm 10\%$	
Temperature Regulation		$\pm 0.02\%/^{\circ}\text{C}$		
Over Current Protect	110%		160%	
Over Voltage Protect	110%		140%	
Over Temperature Protect	110%	115%	125%	
Short Circuit Protect	Continuous, self-recovery			
Dynamic Response	4%Vo Pk deviation 100 μ S settling time		50~75% load 50~25% load	

General Specifications

Isolation Resistor	20M Ω	Input-Output
Isolation Voltage	1500VDC	Input-Output
	1000VDC	Input-Case
	500VDC	Output-Case
Switching Frequency	300KHz	Mil HDBK 217F Tc=25 $^{\circ}\text{C}$
MTBF	1 $\times 10^6$ Hrs	
Case Temperature	-40~+100 $^{\circ}\text{C}$	
Storage Temperature	-55~+125 $^{\circ}\text{C}$	
Relative Humidity	10%-90%	
Pin Solder Temperature	250 $^{\circ}\text{C}$	Soldering spot is 1.5mm away from case for 10 seconds
Hand Soldering Time	5s	Iron Temperature 425 $^{\circ}\text{C}$
Vibration		Sine, 10Hz-55Hz, amplitude 0.35mm, X, Y, Z three directions 30min each
Shock		Half-sine, peak acceleration is 300m/s 2 , standard pulse duration is 6ms, X, Y, Z three 6 consecutive shocks in each direction;
Weight	60g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25 $^{\circ}\text{C}$ room temperature environment.


Dimensions and Recommended Layout

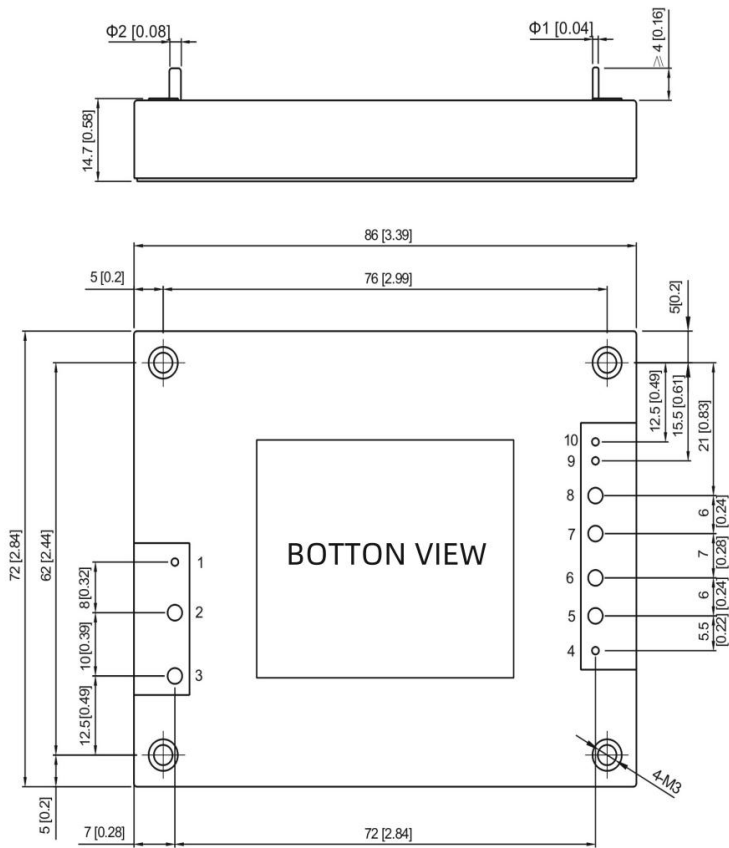

Unit:mm(inch)


Pins			
Pin-Out	Mark		
1	CTL	6	+Vo
2	-Vin	7	-Vo
3	+Vin	8	-Vo
4	+S	9	-S
5	+Vo	10	TRIM

Recommended Circuit			

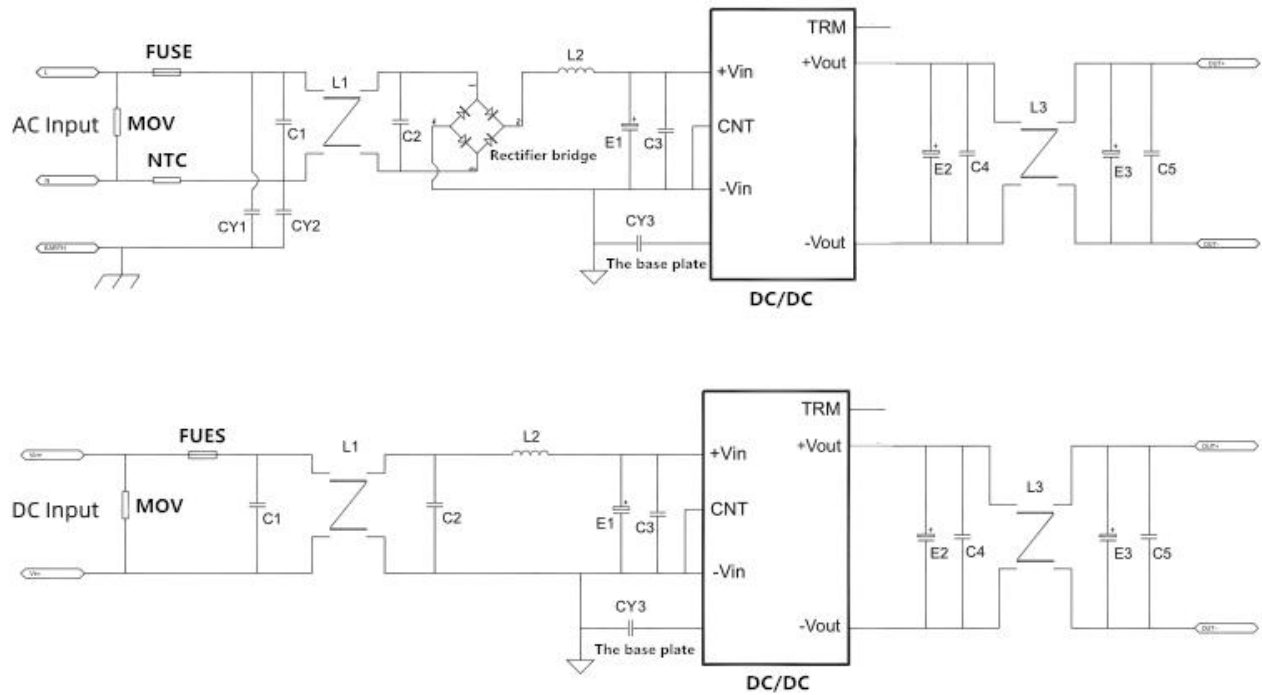

Rated Voltage	Fuse	MOV	bridge rectifier	NTC	C1 C2 C3	CY1 CY2 CY3	E1
110V	5A	300V	10A	8Ω/Φ15	105/200V	472/3KV	220uF/200V
220V	3A	560V	5A	10Ω/Φ15	105/400V	472/3KV	220uF/400V

TRIM

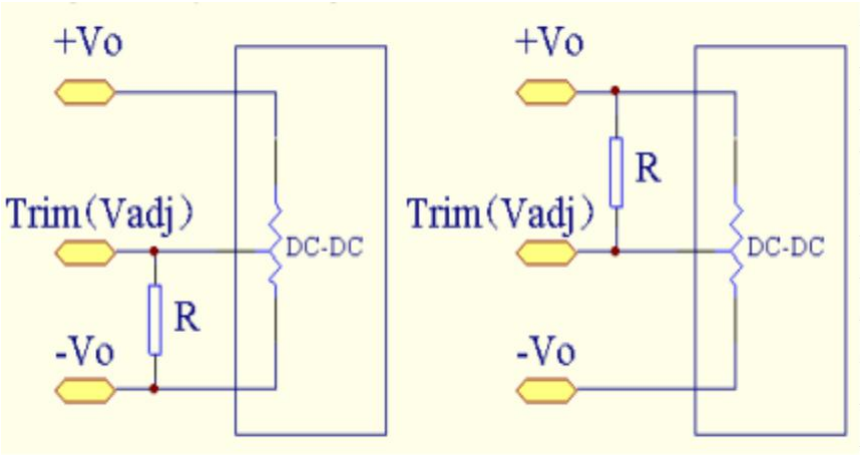

TRIM OUTPUT UP

TRIM OUTPUT DOWN

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.

4. External LC filter circuit can be connected for occasions with high ripple noise requirements.