


FEATURES:

- Wide input range
- Continuous short-circuit protection, self recover
- I/O isolation voltage 1.5KV
- Working temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- No additional components required
- Stable performance and high reliability (MTBF $\geq$ 2 million hours)
- Industry standard pin-out
- Industry standard 1/2 brick package

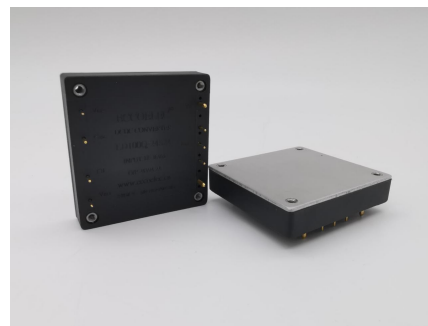

Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normalal (Vdc)	Range (Vdc)	Voltage (V1dc)	current (A)	Voltage (V2dc)	current (A)	
LD350Q-24S12	24	18-36	12	29.2			
LD350Q-24S24			24	23.3			
LD350Q-24S28			28	12.5			
LD350Q-24S32			32	10.9			

customized accepted,pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vdc)	Nom(Vdc)	Max (Vdc)
	18-36	24	36
Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		


Output Specifications

Item	Min	Typ	Max	Test Conditions
Voltage Accuracy		$\pm 1\%$	$\pm 3\%$	
Line Regulation		$\pm 0.2\%$	$\pm 1\%$	
Load Regulation		$\pm 0.5\%$	$\pm 1\%$	
TRIM Range			$\pm 10\%$	
Temperature Regulation		$\pm 0.02\%/^{\circ}\text{C}$		
Over Current Protect	110%		160%	
Over Voltage Protect	110%		140%	
Over Temperature Protect	110%	115%	125%	
Short Circuit Protect	Continuous, self-recovery			
Dynamic Response	4%Vo Pk deviation 100 μs settling time		50~75% load 50~25% load	

General Specifications


Isolation Resistor	20M Ω	Input-Output
Isolation Voltage	1500VDC	Input-Output
	1000VDC	Input-Case

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25°C room temperature environment.



1	-Vin	6	+S
2	CASE	7	TRIM
3	CTRL	8	-S
4	+Vin	9	-Vo
5	+Vo		

Recommended Circuit

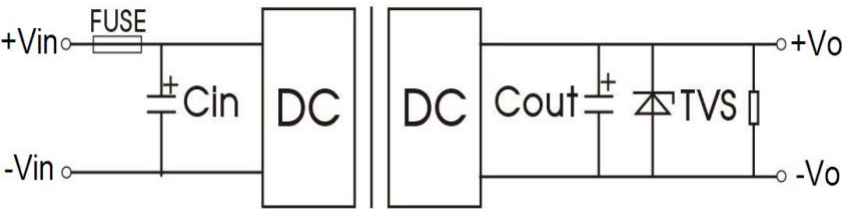

Vo(VDC)	FUSE	Cin	Cout	TVS
5	20A	220uF	470uF	SMDJ7.0A
12			220uF	SMDJ15A
15			220uF	SMDJ18A
24			100uF	SMDJ30A
28			100uF	SMDJ36A
48			100uF	SMDJ64A

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.