


FEATURES:

- Wide input range
- Continuous short-circuit protection
- Working temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- No additional components required
- Stable performance and high reliability (MTBF $\geq$ 2000K hours)
- Industry standard pin-out
- SIP package
- No-load input current as low as 2mA



Selection Guide

Part No.	INPUT		OUTPUT		Full Load Efficiency (%/Typ) Vin Min/Vin Max	Capacitive Load(μF)
	Normal (Vdc)	Range (Vdc)	Voltage (Vdc)	Max current (mA)		
K7803-3AR3	24	8-32	3.3	3000	90/83	1000
K7805-3AR3	24	8-32	5	3000	93/89	680
K78X6-3AR3	24	10-32	6.5	3000	94/90	330
K7809-3AR3	24	13-32	9	3000	95/91	330
K7812-3AR3	24	16-32	12	3000	97/93	330
K7815-3AR3	24	19-32	15	3000	97/94	330

customized accepted ,pls contact sales for details

Input Specifications

Input Filter	Capacitive Filter		
No-load Input Current	2mA(typ),4mA(max)		
Ctrl	Module on		Ctrl pin open or pulled high (TTL 4.5-14VDC)
	Module off		Ctrl pin pulled low to GND(0-0.8VDC)
	Input current when off		4mA(max)

Output Specifications

Item	Typ	Max	Test Conditions
Voltage Accuracy	$\pm 2\%$	$\pm 3\%$	0%-100% load, input voltage range
Line Regulation	$\pm 0.5\%$	$\pm 1\%$	Full load, input voltage range
Load Regulation	$\pm 0.5\%$	$\pm 1\%$	Nominal input voltage, 10% -100% load
Ripple&Noise	50mVp-p	100mVp-p	20MHz Bandwidth, full load


General Specifications

Switching Frequency	250KHz(Typ)	PWM mode
Short-Circuit Protection	Continuous, self-recovery	
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$	Operating ambient temperature -40°C to $+85^{\circ}\text{C}$
Pin Soldering Resistance Temperature	260°C	Soldering spot is 1.5mm away from case for 10 seconds
Operating Temperature	$-40 \sim +85^{\circ}\text{C}$	

Storage Temperature	-55~+125℃	
Storage Humidity	<95%RH	Non-condensing
Cooling Method	Free air convection	
Weight	9.2g	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25℃ room temperature environment.

Dimensions and Recommended Layout

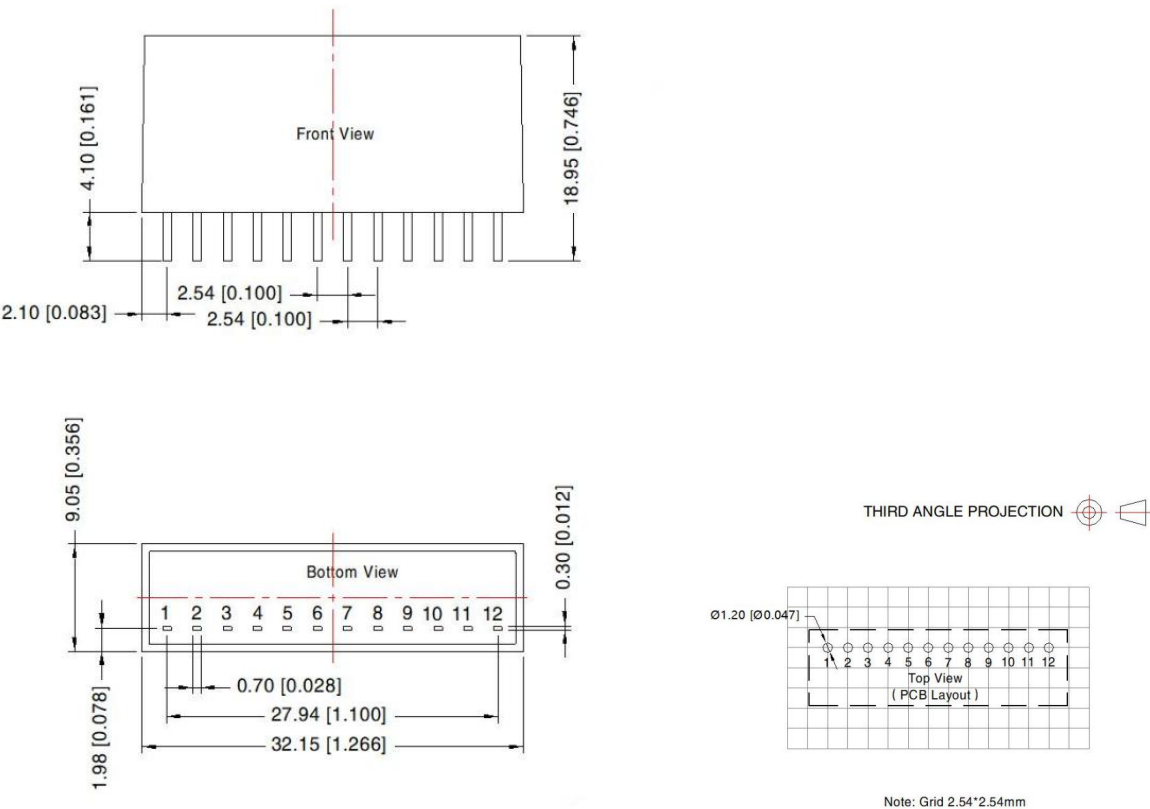

Note:
Unit: mm[inch]
Pin diameter tolerances: ± 0.10[± 0.004]
General tolerances: ± 0.50[± 0.020]

Pins

Pin-out	Mark		
1	CTRL	9,10	+Vo
2,3,4	Vin	11	+Vo
5,6,7,8	GND	12	TRIM

Recommended Circuit

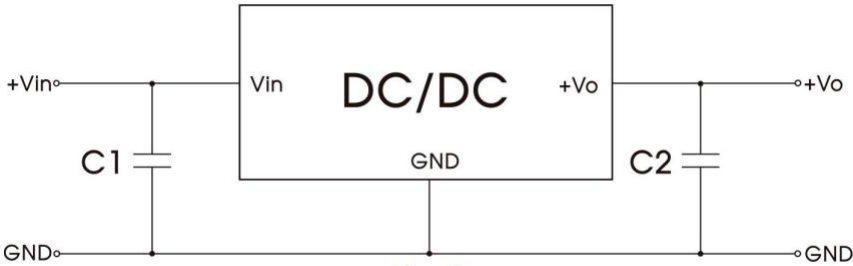


Fig. 2

Part Number	C1 (Ceramic capacitor)	C2 (Ceramic capacitor)
K7803-3AR3	10uF/50V	22uF/10V
K7805-3AR3		22uF/10V
K78X6-3AR3		22uF/10V
K7809-3AR3		22uF/16V
K7812-3AR3		22uF/25V
K7815-3AR3		22uF/25V

EMC


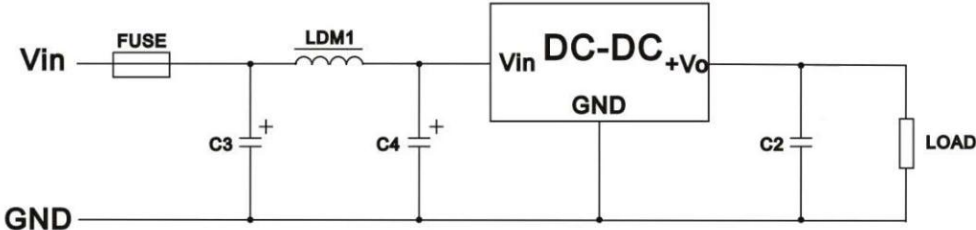


Fig.3 EMC compliance circuit

	FUSE	C3	LDM1	C4	C2
Emissions	Select fuse value according to actual input current	100μF /50V	22μH	100μF /50V	Refer to the C2 in Fig. 2
Immunity				680μF /50V	

TRIM

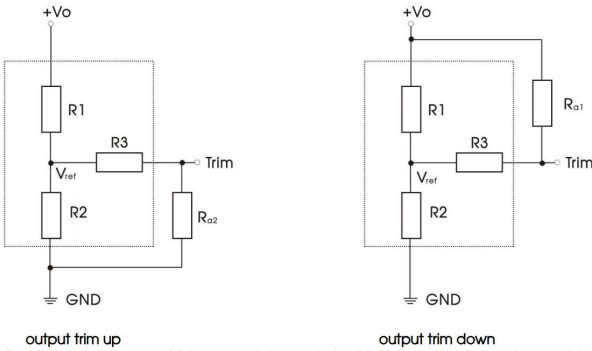

$$\text{Trim up : } R_{a2} = \frac{aR_2}{R_2 - a} - R_3, \quad a = R_2 / (R_3 + R_{a2}) = \frac{V_{ref} - V_o}{V_o - V_{ref}} R_1$$

$$\text{Trim down : } R_{a1} = \frac{aR_1}{R_1 - a} - R_3, \quad a = R_1 / (R_3 + R_{a1}) = \frac{V_o - V_{ref}}{V_{ref}} R_2$$

Output voltage(VDC)	R1(K)	R2(K)	R3(K)	Vref(V)
3.3	47	10.5	7.5	0.6
5	100	13.7	7.5	0.6
6.5	118	12	7.5	0.6
9	140	10	7.5	0.6
12	200	10.5	7.5	0.6
15	240	10	7.5	0.6

Vout nom(Vo)	3.3VDC		5VDC		6.5VDC		9VDC		12VDC		15VDC	
Vout adj(Vo')	Ra1	Ra2	Ra1	Ra2	Ra1	Ra2	Ra1	Ra2	Ra1	Ra2	Ra1	Ra2
3	387.3K											
3.3												
4		32.0K	139.4K									
4.5		15.7K	805.7K									
5												
5.5				107.8K	570.7K							
6				51.3K	1266.9K							
6.5												
7						134.1K	440.5K					
8						39.7K	1028.5K					
9												
10								76.5K	919.3K			
11								34.5K	2014.7K			
12												
13										116.0K	1480.5K	
14										53.4K	3208.5K	
15												
16												136.5K
17												64.5K

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.

*The final interpretation right of the product belongs to ECCO ELECTRONICS.