


FEATURES:

- Wide input range: 85-305VAC
- Short-circuit protection, over current protect, over voltage protect, over temperature protect
- Efficiency(typ):81%
- Switching frequency: 65Khz
- No load power(typ):0.3W
- PCB mount



Selection Guide

Part No.	INPUT		OUTPUT				Capacitive Load(μF)
	Normal (Vac)	Range (Vac)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LA10-220S3V3C	220	85-305	3.3	2000			2200
LA10-220S05C			5	2000			1500
LA10-220S09C			9	1111			680
LA10-220S12C			12	833			470
LA10-220S15C			15	667			330
LA10-220S24C			24	417			220

customized accepted, pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vac)	nominal input voltage	Max (Vac)
	85-305	220	305
Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		

Output Specifications

Item	Typ	Max	Test Conditions
Voltage Accuracy	±5%		
Line Regulation	±1.5%		
Load Regulation	±3%		
Ripple&Noise	75mVp-p		20MHz Bandwidth, full load


General Specifications

Switching Frequency	65KHz(Typ)	100% full load, nominal input voltage
Short-Circuit Protection	Continuous, self-recovery	
Isolation (Input-Output)	4000VAC	Input-output electric strength test for 1 minute with a leakage current
Operating Temperature	-40~+85℃	
Storage Temperature	-55~+105℃	
Storage Humidity	<95%RH	Non-condensing

Cooling Method	Free air convection	
Weight	5g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25°C room temperature environment.

Dimensions and Recommended Layout

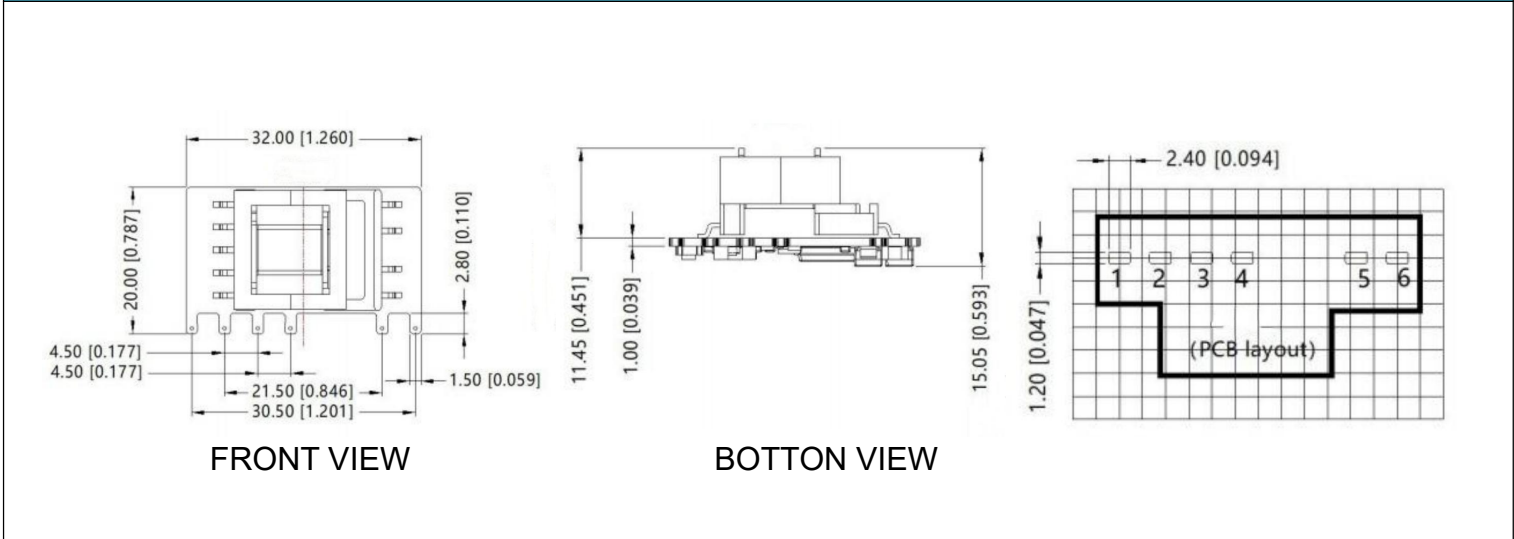

Pins

Pin	Single		
1	N	4	-V
2	L	5	-Vo
3	+V	6	+Vo

*The final interpretation right of the product belongs to ECCO ELECTRONICS.