

FEATURES:

- Wide input range: 85-265VAC
- Short-circuit protection, over current protect, over voltage protect, over temperature protect
- Efficiency(typ):81%
- Switching frequency: 65Khz
- No load power(typ):0.1W
- Metal case
- PCB mount



Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Normal (Vac)	Range (Vac)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LA50-220S05B	220	85-265	5	10000			
LA50-220S09B			9	5556			
LA50-220S12B			12	4200			
LA50-220S15B			15	3333			
LA50-220S24B			24	2100			
LA50-220D05B			+5	5000	-5	5000	
LA50-220D12B			+12	2100	-12	2100	
LA50-220D15B			+15	1667	-15	1667	
LA50-220D24B			+24	1050	-24	1050	

customized accepted, pls contact sales for details

Input Specifications

Input Voltage Range	Input Voltage Range (Vac)	nominal input voltage	Max (Vac)
	85-265	220	265
Input Filter	Capacitive Filter		
Ctrl	NONE		
	NONE		
Hot Plug	Unavailable		

Output Specifications

Item	Typ	Max	Test Conditions
Voltage Accuracy	±1%		
Line Regulation	±0.5%		
Load Regulation	±0.5%		
Ripple&Noise	50mVp-p(typ)		20MHz Bandwidth, full load


General Specifications

Switching Frequency	65KHz(Typ)	100% full load, nominal input voltage
Short-Circuit Protection	Continuous, self-recovery	
Isolation (Input-Output)	2500VAC	Input-output electric strength test for 1 minute with a leakage current

Operating Temperature	-25~+75℃	
Storage Temperature	-40~+85℃	
Storage Humidity	<95%RH	Non-condensing
Cooling Method	Free air convection	
Case Material	Metal case	
Weight	100g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25℃ room temperature environment.

Dimensions and Recommended Layout

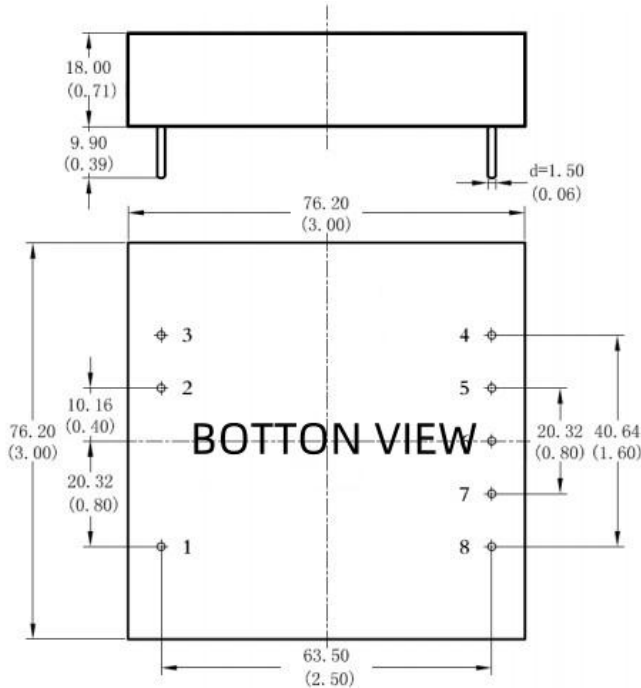

Unit:mm(inch)

Pins

Pin-out	Mark			
1	FG			
2	N			
3	L			
4	GND			
5	+S			
6	TRIM			
7	-S			

*The final interpretation right of the product belongs to ECCO ELECTRONICS.