

FEATURES:

- Wide input range
- Continuous short-circuit protection, self recover
- I/O isolation voltage 1.5KV
- Working temperature: -40°C~+85°C
- No additional components required
- Stable performance and high reliability (MTBF≥1000K hours)
- Industry standard pin-out
- Flame-retardant case to meet UL94-V0 requirements
- DIP package

Selection Guide

Part No.	INPUT		OUTPUT				CapacitiveLoad(μF)
	Norminal (Vdc)	Range (Vdc)	Voltage (V1dc)	current (mA)	Voltage (V2dc)	current (mA)	
LD10-12S05A	12	9-18	5	2000			
LD10-12S09A			9	1110			
LD10-12S12A			12	830			
LD10-12S15A			15	660			
LD10-12S24A			24	410			
LD10-12S48A			48	208			
LD10-24S05A	24	18-36	5	2000			
LD10-24S09A			9	1110			
LD10-24S12A			12	830			
LD10-24S15A			15	660			
LD10-24S24A			24	410			
LD10-24S48A			48	208			
LD10-48S05A	48	36-72	5	2000			
LD10-48S09A			9	1110			
LD10-48S12A			12	830			
LD10-48S15A			15	660			
LD10-48S24A			24	410			
LD10-48S48A			48	208			
LD10-110S05A	110	72-144	5	2000			
LD10-110S09A			9	1110			
LD10-110S12A			12	830			
LD10-110S15A			15	660			
LD10-110S24A			24	410			
LD10-110S48A			48	208			

customized accepted ,pls contact sales for details

Input Specifications

Input Voltage Range (Vdc)	Nom(Vdc)	Max (Vdc)
---------------------------	----------	-----------

Input Voltage	9-18	12	18
	18-36	24	36
	36-72	48	72
	72-144	110	144
Hot Plug	Unavailable		

Output Specifications


Item	Typ	Max	Test Conditions
Voltage Accuracy	±1%	±3%	0-100% load
Line Regulation	±0.2%	±0.5%	Input voltage variation from low to high at full load
Load Regulation	±0.5%	±1%	5%-100% load
Ripple&Noise	-	100mVp-p	20MHz bandwidth, 5%-100% load
Transient Recovery Time	300μs	500μs	25% load step change, Nominal input voltage
Over-voltage Protection	-	160%Vo	110%Vo(Min)
Over-current Protection	140%Io	190%Io	110%Io(Min)
Short-circuit Protection			Continuous, self-recovery

General Specifications

Switching Frequency	300KHz(Typ)	PWM mode
MTBF	1000 K hours	MIL-HDBK-217F@25°C
Temperature Coefficient	0.03%/°C	100% full load
Isolation (Input-Output)	1.5KVDC	
Insulation Resistance	1000MΩ	Input-output resistance 500Vdc
Operating Temperature	-40~+85°C	
Storage Temperature	-55~+125°C	
Storage Humidity	5-95%	Non-condensing
Cooling Method	Free air convection	
Case Material	Aluminum alloy	
Weight	12g (Typ)	

**Unless specified, otherwise all other parameters are tested under the following conditions: nominal input voltage, pure resistive load, 25°C room temperature environment.

Dimensions and Recommended Layout

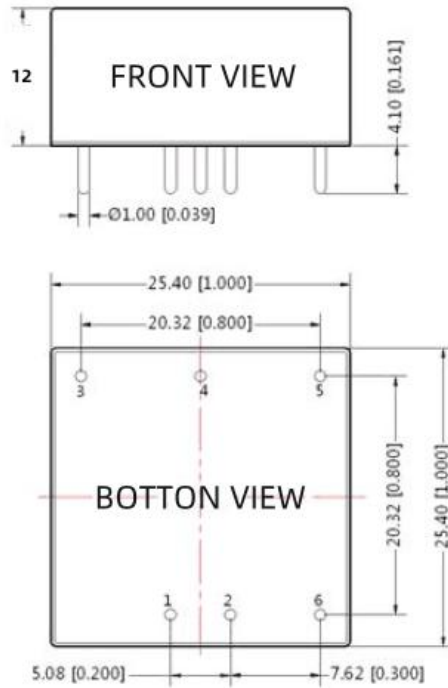


Unit:mm(inch)

Pins

Pin-Out	Mark		
1	+Vin		
2	-Vin		
3	GND		
4	No Pin		
5	Vo1		

Recommended Circuit

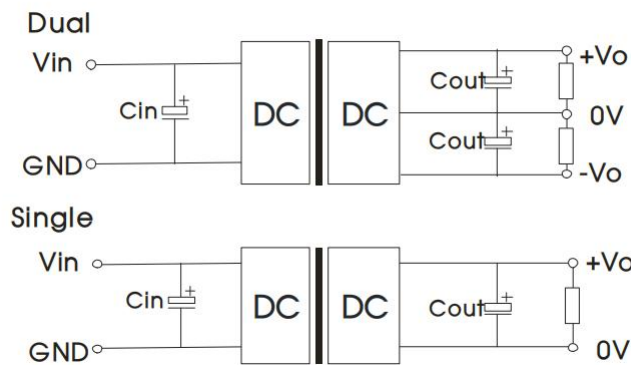

Recommended input and output capacitor values

V_{in}	C_{in}	C_{out}		
5	100uF/16V			
12	100uF/25V			
24	10uF/50V-47uF/50V			

48

10uF/100V-47uF/100V

Noted

1. Input current: Ensure that the output current of the power supply meets the instantaneous starting current of the power module (that is, twice the average input current of the power module).
2. Output load requirements: Avoid no-load use. When the actual power consumption of the load is less than 10% of the rated output power of the module or no load occurs, connect an external resistance to the output end (the sum of the external resistance and the load power is greater than or equal to 10% of the rated load) or select a module with a smaller rated power.
3. The external capacitance of the output end should not be too large; otherwise, the module may be overcurrent or poorly started. For details, see the external capacitance recommendation table.
4. External LC filter circuit can be connected for occasions with high ripple noise requirements.